


Polyester braided sleeving with an aluminium acrylic coating

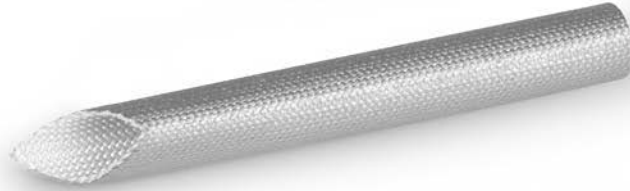

CHARACTERISTICS

- Temperature class : F
- Continuous working temperature : from -25°C to +180°C.
Peaks at 200°C (few hours)
- Halogen free
- Good mechanical resistance
 - » Excellent resistance to abrasion
 - » Excellent resistance to cut
- Good heat reflection
- Good compatibility with same class impregnation varnishes
- Good resistance to fray
- Good resistance to UV
- Very flexible

STANDARDS*

- Compliant with RoHS directive
- Compliant with Reach regulation
- EN (CEI) 60684-3 sheets 403 at 405 (05/2002)
- EN 60684-1 (10/2003)
- EN 60684-2 (07-2012)

COLOURS AND PACKAGINGS

- Manufactured diameters : From 1 to 12 mm
- Standard colour : Aluminium

Standard packaging :

- Diameter 1 to 4 mm : 200 m
- Diameter 5 to 12 mm : 100 m
- Other diameter on request

APPLICATIONS



Inner diameter (mm)	1	1.5	2	2.5	3	3.5	4	5	6	7	8	9	10	11	12
Tolerance inner diameter (± mm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.5	0.5	0.5	0.5
Minimum wall thickness (mm)	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.6	0.6	0.6	0.6	0.6	0.7	0.7

* Our products pass all or parts of requirements for the above-mentioned standards. The technical information written on our datasheets correspond to the most recent knowledges we have on those products, but the user is not exempted to verify the performances in the real particular context of application.